


R14P(14D)



Dimensions

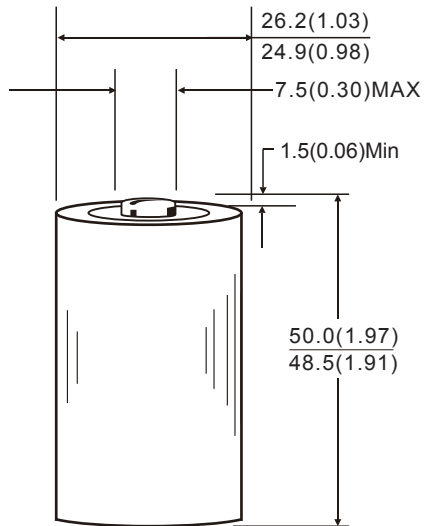

Unit:mm(inch)

Super Heavy Duty Battery

Specifications

Chemical System:	Zinc-Manganese Dioxide (Zinc Chloride Electrolyte)
IEC Name:	R14P
ANSI/NEDA:	14D(C)
Camelion Model:	R14P
Average Weight:	42g
Dimension($\Phi \times H$):	$25.55^{+0.65}_{-0.02} \times 49.25^{+0.75}_{-0.02}$ mm $1.0^{+0.02}_{-0.02} \times 1.94^{+0.02}_{-0.02}$ inch
Terminals:	Flat
Nominal Voltage:	1.5Volts
Capacity:	3800mAh (Rated at 25mA to 0.8V)
Operating Temperature:	-18°C -55°C
Storage Temperature:	15°C -25°C
Relative Humidity:	60±15%
Jacket :	Aluminum Foil Label

Usage Guide



Flashlight



Clock



Radio

Cautions

Storage

Store the battery in a cool, dry and well-ventilated area.





Handling

- 1) Never charge the battery. Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals. Keep away from metal or other conductive materials.
- 2) Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.
- 3) When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.
- 4) In case the battery electrolyte happen to come into mouth, gargle well enough and consult a doctor immediately.

R14P(14D)

Super Heavy Duty Battery

ANSI/IEC Standard Testing
Typical characteristics 21°C

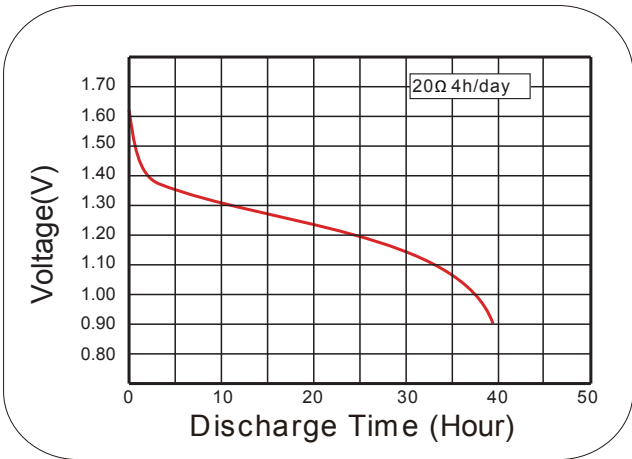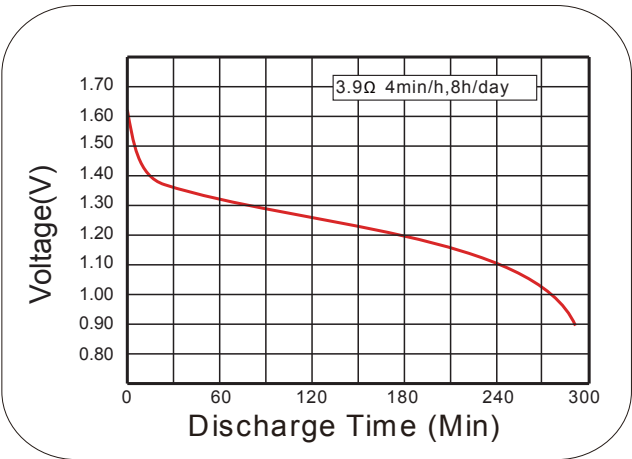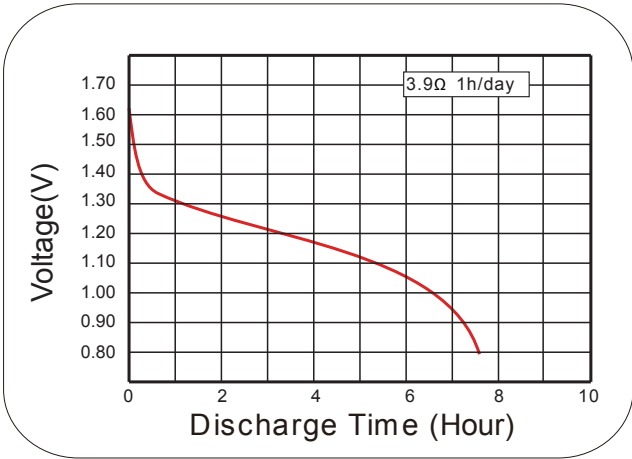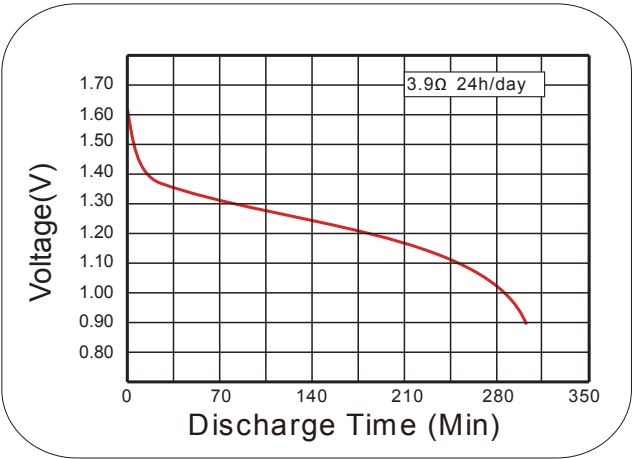

Notice:
Environmental elements comply with 2006/66/EC requirements. This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty. For additional information, please consult your nearest Camelion Sales Office or Distributor or visit our website at: www.camelionbattery.com.