


R20P(13D)

Super Heavy Duty Battery



Dimensions

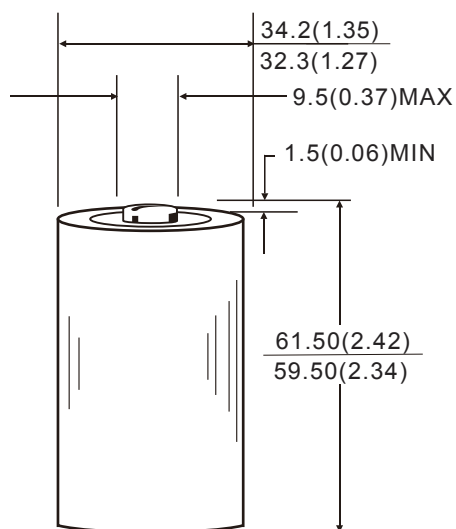

Unit:mm(inch)

Specifications

Chemical System:	Zinc-Manganese Dioxide (Zinc Chloride Electrolyte)
IEC Name:	R20P
ANSI/NEDA:	13D(D)
Camelion Model:	R20P
Average Weight:	86g
Dimension(ΦxH)	33.25 ^{±0.95} x 60.5 ^{±1} mm 1.31 ^{±0.04} x 2.38 ^{±0.04} inch
Terminals:	Flat
Nominal Voltage:	1.5Volts
Capacity:	8000mAh (Rated at 25mA to 0.8V)
Operating Temperature:	-18℃-55℃
Storage Temperature:	15℃-25℃
Relative Humidity:	60±15%
Jacket :	Aluminum Foil Label

Usage Guide



Flashlight



Clock



Radio

Cautions

Storage

Store the battery in a cool, dry and well-ventilated area.

Handling





- 1) Never charge the battery. Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals. Keep away from metal or other conductive materials.
- 2) Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.
- 3) When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.
- 4) In case the battery electrolyte happen to come into mouth,gargle well enough and consult a doctor immediately.

R20P(13D)

Super Heavy Duty Battery

ANSI/IEC Standard Testing

Typical characteristics 21°C

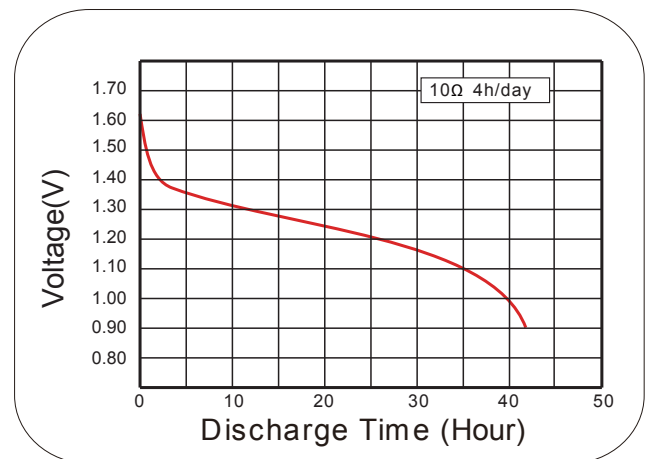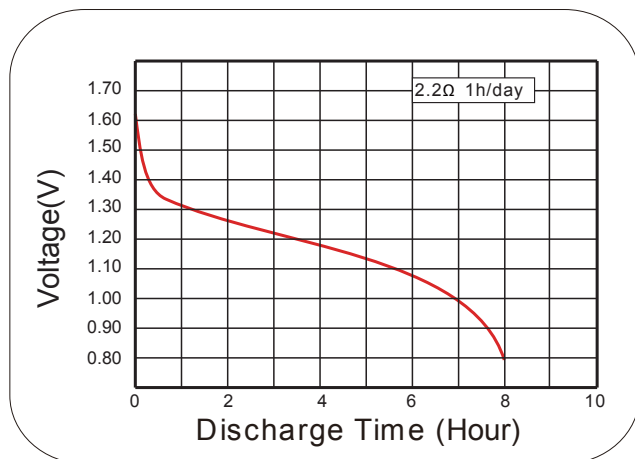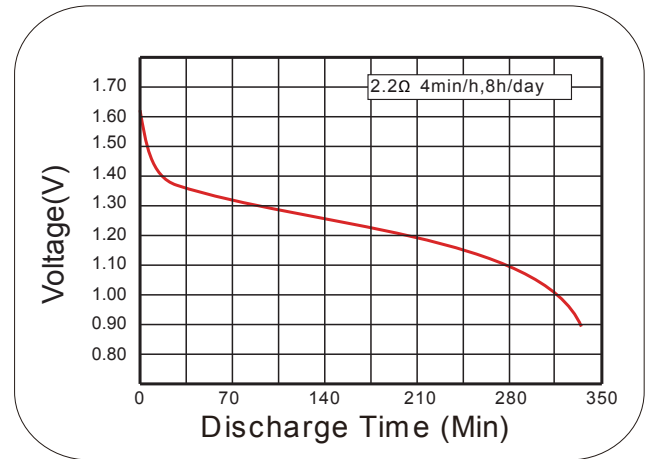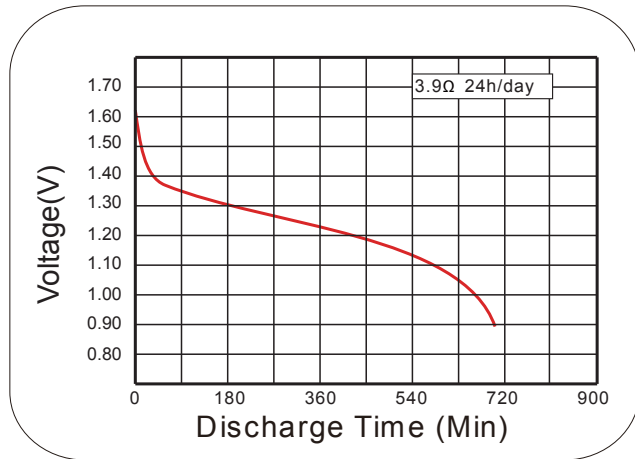

Notice:

Environmental elements comply with 2006/66/EC requirements. This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty. For additional information, please consult your nearest Camelion Sales Office or Distributor or visit our website at: www.camelionbattery.com.