


6F22(1604D)



Dimensions

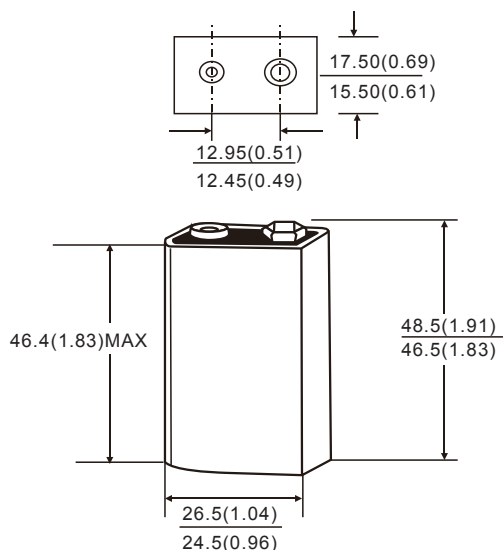

Unit:mm(inch)

Super Heavy Duty Battery

Specifications

Chemical System:	Zinc-Manganese Dioxide (Zinc Chloride Electrolyte)
IEC Name:	6F22
ANSI/NEDA:	1604D(9V)
Camelion Model:	6F22
Average Weight:	36g
Dimension(LxWxH)	25.5 ^{±1} x16.5 ^{±1} x47.5 ^{±1} mm 1 ^{±0.04} x0.65 ^{±0.04} x1.87 ^{±0.04} inch
Terminals:	Flat
Nominal Voltage:	9.0Volts
Capacity:	190mAh (Rated at 5mA to 4.8V)
Operating Temperature:	-18°C -55°C
Storage Temperature:	15°C -25°C
Relative Humidity:	60±15%

Usage Guide



Electronic games



Multimeter



Microphone

Cautions

Storage

Store the battery in a cool, dry and well-ventilated area.

Handling

- 1) Never charge the battery. Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals. Keep away from metal or other conductive materials.
- 2) Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.
- 3) When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.
- 4) In case the battery electrolyte happen to come into mouth,gargle well enough and consult a doctor immediately.

Notice:




Environmental elements comply with 2006/66/EC requirements.This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty . For additional information, please consult your nearest Camelion Sales Office or Distributor or visit our website at: www.camelionbattery.com.

6F22(1604D)

Super Heavy Duty Battery

ANSI/IEC Standard Testing

Typical characteristics 21 °C

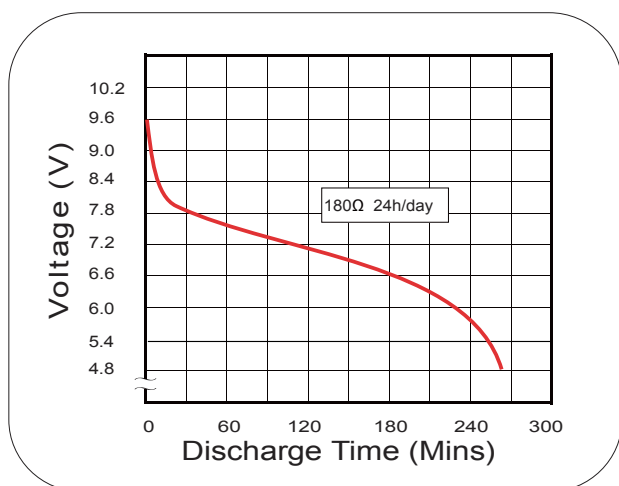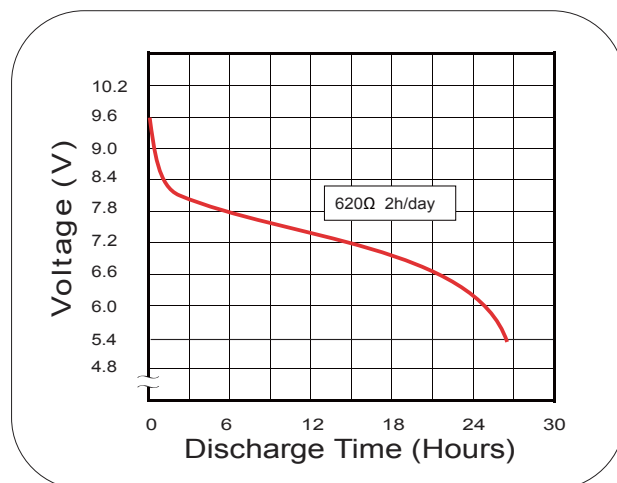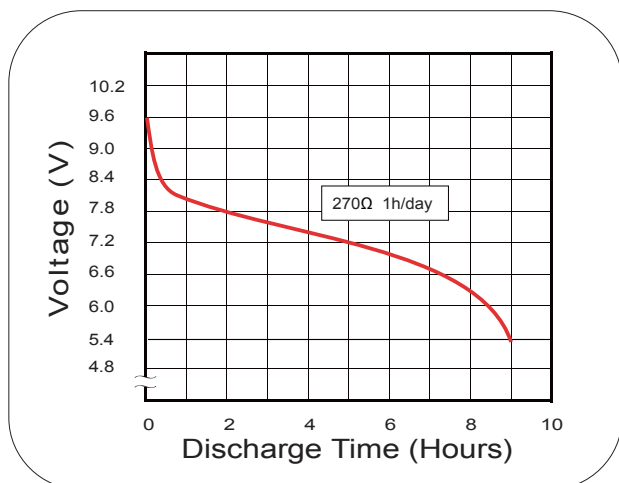

Notice:

Environmental elements comply with 2006/66/EC requirements. This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty. For additional information, please consult your nearest Camelion Sales Office or Distributor or visit our website at: www.camelionbattery.com.